



VILLBEK
Ladders

by Arizona

STANDARD FIBREGLASS LADDERS

Single section ladder. Page 02
Single section folding ladder. Page 02
Push-up extension ladder. Page 03
Rope-operated extension ladder. Page 03
Two section combination ladder. Page 04
Three section combination ladder. Page 04
Double-sided ladder. Page 05
Fibreglass double-sided conical ladder. Page 05
Double-sided ladder with a third fly section. Page 06
Platform stepladder with aluminium treads. Page 06
Platform stepladder with fibreglass treads. Page 07
Double-sided ladder with aluminium treads. Page 07
Plug-in ladder. Page 08
Fibreglass work platform. Page 08

FIBREGLASS SAFETY LADDERS EQUIPPED WITH AN ANCHORAGE POINT

Safety ladder ARISAFE-1. Page 10
Safety ladder ARISAFE-2. Page 11
Safety ladder ARISAFE-3. Page 12
Safety ladder ARISAFE-4. Page 13

STANDARD TIMBER LADDERS

Single section ladder. Page 14
Extension ladders. Page 14
Double-sided ladder model D. Page 15
Double-sided ladder model G. Page 15

STANDARD ALUMINIUM LADDERS

Single section ladder. Page 16
Rope-operated extension ladder. Page 16
Two section combination ladder. Page 17
Aluminium two section combination ladder "Aralar". Page 17
Three section combination ladder. Page 18
Aluminium three section combination ladder "Arlas". Page 18
Aluminium platform stepladder "Urbasa". Page 19
Platform stepladder "Roncal". Page 19
Platform stepladder "Galar". Page 20
Double-sided stool "Yesa". Page 20
Aluminium double-sided ladder "Ori". Page 21
Double-sided ladder "Isaba". Page 21
Double-sided telescopic ladder "Irati". Page 22
Telescopic multipurpose ladder "Zizur". Page 22
Farm ladder. Page 23
Work platform "Baztán". Page 23

ROLLING PLATFORM LADDERS

Fibreglass rolling platform ladder. 65° climbing angle. Page 24
Fibreglass rolling platform ladder. 55° climbing angle. Page 24
Aluminium rolling platform ladder "Estella". Page 25
Dual access aluminium rolling platform ladder "Viana". Page 25
Aluminium rolling platform ladder "Beire". Page 26
Aluminium rolling platform ladder "Olite". Page 26
Aluminium rolling platform ladder "Ujué". Page 27
Aluminium rolling platform ladder "Burgui". Page 27
Aluminium industrial stool "Unx". Page 28
Fibreglass one section access ladder with handrails. Page 28

FIREFIGHTERS AND RESCUE LADDERS

Fibreglass assault ladder F-ASALT and F-ASALT-P. Page 30
Fibreglass assault ladder. F-ASALT V027. Page 30
Fibreglass rope-operated extension ladder UNE 1147. Page 31
Aluminium rope-operated extension ladder UNE 1147. Page 31

FIXED VERTICAL LADDER / SHAFT LADDERS

Fibreglass fixed vertical ladder. Page 32
Aluminium fixed vertical ladder. Page 32

SCAFFOLDS


Fibreglass scaffold. Page 33
Aluminium scaffolds. Page 33

ACCESSORIES

Lifeline, harness, helmet, mounts for roof racks, Safeclamp®, Pole Grip, Pole Grip and lash, height adjustable legs, height adjustable stabiliser, tool holder tray, hooks, chains and eyebolts and leg leveller for stepladders and single-section folding ladders. Page 34

All the products made by **Escaleras Arizona** are manufactured according to the European standards and our quality management system is ISO 9001 certified.

Bending test



Electrical test



STANDARD FIBREGLASS LADDERS

FIBREGLASS SINGLE SECTION LADDER

10 YEARS WARRANTY



MADE SPAIN

150 KG

Standard
UNE-EN 131

Standard
UNE-EN 50528

Insulation
100 KV

Ref.	N° Rungs			Kg
F6105	5	1485	400	5
F6106	6	1765	400	5.5
F6107	7	2045	400	6
F6108	8	2325	400	6.5
F6109	9	2650	400	7
F6110	10	2990	400	8.5
F6111	11	3270	400	9.5
F6112	12	3550	400	10.5
F6113	13	3830	400	11
F6114	14	4110	400	12
F7115	15	4390	400	13
F7116	16	4670	400	14
F7117	17	4950	400	15
F7118	18	5230	400	16
F7119	19	5510	400	17
F7120	20	5790	400	18
F7121	21	6070	400	19

* See optional accessories available on page 34-36.



Ref. F6114



Equipped with swivel feet from ref. F6110 upwards



Optional height-adjustable legs



Optional base stabiliser. According to new standard UNE-EN 131 when height exceeds 3 m.

FIBREGLASS SINGLE SECTION FOLDING LADDER

Equipped with a locking system that allows its use as a double-sided ladder or as a single section ladder and permits to fold it for transport and storage.

10 YEARS WARRANTY



MADE SPAIN

150 KG

Standard
UNE-EN 131

Standard
UNE-EN 50528

Insulation
100 KV

Ref.	N° Rungs			Kg
F6106P	2x3	894	1726	6
F6108P	2x4	1180	2280	8
F6110P	2x5	1460	2840	9
F6112P	2x6	1740	3400	11



Ref. F6110P



The values are shown in millimetres.

FIBREGLASS PUSH-UP EXTENSION LADDER

The two sections can be separated.

Rope-operated extension ladder is recommended when height exceeds 7 m.



Ref.	N° Rungs				Kg
F6206M	2x6	1880	3000	438	11
F6207M	2x7	2160	3560	438	12.5
F6208M	2x8	2440	4120	438	14
F6209M	2x9	2720	4400	438	15.5
F7210M	2x10	3000	4960	450	21
F7211M	2x11	3280	5520	450	22.5
F7212M	2x12	3560	6080	450	24
F7213M	2x13	3840	6640	450	25.5
F7214M	2x14	4120	7200	450	27

* For other measures, please contact us.

* See optional accessories available on page 34-36.



Ref. F7212M



Equipped with wall wheels from ref. F7210M upwards



Optional height-adjustable legs



Optional base stabiliser. According to new standard UNE-EN 131 when height exceeds 3 m.

FIBREGLASS ROPE-OPERATED EXTENSION LADDER

Equipped with a double pulley system that ease the extension of the fly section (from F9215C upwards).



Ref.	N° Rungs				Kg
F7210C	2x10	3000	4960	450	24
F7211C	2x11	3280	5520	450	25.5
F7212C	2x12	3560	6080	450	27
F7213C	2x13	3840	6640	450	28.5
F7214C	2x14	4120	7200	450	30
F9215C	2x15	4400	7760	450	34
F9216C	2x16	4680	8320	450	36
F9217C	2x17	4960	8880	450	38
F9218C	2x18	5240	9440	450	40
F9219C	2x19	5520	10000	450	42
F9220C	2x20	5800	10280	450	44
F9221C	2x21	6080	10560	450	46

* See optional accessories available on page 34-36.



Ref. F7212C



Locking system



Optional height-adjustable legs



Optional base stabiliser. According to new standard UNE-EN 131 when height exceeds 3 m.

STANDARD FIBREGLASS LADDERS

FIBREGLASS TWO SECTION COMBINATION LADDER

Can be used as a double-sided ladder and as a push-up extension ladder.
The two sections can be separated.
Optional height adjustable stabiliser (on demand production).



Ref.	N° Rungs				Kg
FC6206	2x6	1780	3000	665	15
FC6207	2x7	2060	3560	705	16.5
FC6208	2x8	2340	4120	745	18
FC6209	2x9	2660	4680	795	19.5
FC7210	2x10	2940	4960	835	21
FC7211	2x11	3220	5520	880	22.5
FC7212	2x12	3500	6080	925	24



Ref. FC7210

FIBREGLASS THREE SECTION COMBINATION LADDER

Can be used as a double-sided ladder and as a push-up extension ladder.
The two sections can be separated.
Optional height adjustable stabiliser (on demand production).



Ref.	N° Rungs				Kg	
FC7306	3x6	1885	2985	4115	726	25
FC7307	3x7	2165	3545	4955	775	27
FC7308	3x8	2445	4105	5795	824	29
FC7309	3x9	2725	4385	6075	873	31
FC7310	3x10	3005	4945	6915	922	33
FC7311	3x11	3285	5505	7755	971	35



Mod. FC7308

The values are shown in millimetres.

FIBREGLASS DOUBLE-SIDED LADDER



Ref.	N° Rungs			Kg
FT05	5	1490	580	9
FT06	6	1770	590	10
FT07	7	2050	620	12
FT08	8	2330	650	13
FT09	9	2660	680	15
FT10	10	2940	710	16
FT11	11	3220	740	18
FT12	12	3500	770	19
FT13	13	3780	800	25
FT14	14	4060	830	26
FT15	15	4340	860	28
FT16	16	4620	890	29



Ref. FT07



Anti-splay restraint strap



Stabiliser

FIBREGLASS DOUBLE-SIDED CONICAL LADDER

Designed with a conical shape in order to increase the base of support (without base stabiliser).



Ref.	N° Rungs			Kg
FT04C	2x4	1210	498	6
FT05C	2x5	1490	532	7,5
FT06C	2x6	1770	566	9
FT07C	2x7	2050	600	10,5
FT08C	2x8	2330	635	12
FT09C	2x9	2660	669	13,5
FT10C	2x10	2940	706	15



Ref. FT07C



Double-sided ladder



Non-slip rubber feet

STANDARD FIBREGLASS LADDERS

FIBREGLASS DOUBLE-SIDED LADDER WITH A THIRD FLY SECTION

The fly section can be separated.



Standard
UNE-EN 131

Standard
UNE-EN 50528

Insulation
100 KV

Ref.	Profiles dimensions	N° sections x n° rungs				Kg
FTE05	60x20	3x5	1490	2395	650	14
FTE06	60x20	3x6	1770	2955	680	16
FTE07	60x20	3x7	2050	3515	710	18
FTE08	60x20	3x8	2330	3795	740	20
FTE09	60x20	3x9	2660	4400	770	22
FTE10	60x20	3x10	2940	4960	800	24
FTE11	70x26	3x11	3220	5240	830	33
FTE12	70x26	3x12	3500	5800	860	36



Ref. FTE09



Locking system



Double-sided ladder



Fly section as a single section ladder

FIBREGLASS DOUBLE-SIDED LADDER WITH ALUMINIUM TREADS

80 mm aluminium treads.



Standard
UNE-EN 131

Insulation
75 KV

Ref.	N° Treads			Kg
FAT06P	2x6	1500	540	7.5
FAT08P	2x8	2000	580	10.5
FAT10P	2x10	2500	635	13.5
FAT12P	2x12	3000	685	21.5



Ref. FAT08P



Anti-splay system



Aluminium tread

The values are shown in millimetres.

FIBREGLASS PLATFORM STEPLADDER WITH ALUMINIUM TREADS

80 mm aluminium treads.



Standard
UNE-EN 131

Insulation
5 KV

Ref.	N° Treads				Kg
FATP05P	4+plat.	1800	1160	510	6
FATP06P	5+plat.	2030	1390	530	7
FATP07P	6+plat.	2250	1610	570	8
FATP08P	7+plat.	2500	1850	580	9
FATP10P	9+plat.	2940	2300	640	11



Ref. FATP07P



Aluminium tread



Tool holder tray

FIBREGLASS PLATFORM STEPLADDER WITH FIBREGLASS TREADS

80 mm fibreglass treads.



Standard
UNE-EN 131

Standard
UNE-EN 50628

Insulation
100 KV

Ref.	N° Treads				Kg
F6TP03P	2+plat.	1462	728	480	10
F6TP04P	3+plat.	1742	981	495	11
F6TP05P	4+plat.	2022	1235	510	12
F6TP06P	5+plat.	2303	1489	530	15
F6TP07P	6+plat.	2582	1743	560	17
F6TP08P	7+plat.	2862	1997	590	18



Ref. F6TP08P



Tool holder tray



Fibreglass platform



Anti-splay restraint straps

STANDARD FIBREGLASS LADDERS

FIBREGLASS PLUG-IN LADDER



MADE SPAIN



Standard
UNE-EN 61478

Insulation
100 KV

The ladder comprises a base section, as many intermediate sections as required to reach the height needed, and a top section.

- › Base section F-PBAS: 7 rungs / 2.12 m height. Accessories:
 - Rubber swivel feet for added grip on the ground.
 - Two pole lashes, located at the height of the third and seventh rung from the base.
 - Two pole grips.
- › Intermediate sections F-PINT: 7 rungs / 2.12 m height. Accessories:
 - One pole lash, located at the height of the fifth rung from the base of the section.
 - One pole grip.
- › Upper section F-PSUP: 4 rungs / 1.48 m height. Accessories:
 - One pole lash located at the height of the third rung from the base of the section.
 - One pole grip.

Each pole lash has a total length of 2.3 m.

Optional height-adjustable legs.



Optional height-adjustable legs



Support and anchor system



Connection system

FIBREGLASS WORK PLATFORM

Optional accessories: guardrail and stabiliser (on-demand production).



MADE SPAIN



Ref.	N° Treads		Platform		Kg
PL490	1+plat.	490	390x1300	430	19
PL740	2+plat.	740	390x1300	430	20
PL990	3+plat.	990	390x1500	430	21



Ref. PL990 with guardrail.



SAFETY LADDER ARISAFE-1

Specially designed for tasks to be carried out on wooden poles but it can also be used on walls. Equipped with extendible legs with hooks, anchorage point UNE-EN 795, height-adjustable legs, pole grip, eye-bolts and grippers.

Optional accessories: lifeline, harness, clamping system for ladders (Safeclamp®), helmet and mounts for roof racks for stabilising extendible legs. See page 34.



Ref. F7212MT
Extendible Legs PG12A



Anchorage point
– Pole grip



Height-adjustable
legs



Hooking system
of the aluminium
extendible legs

Ladder							Stabilising Legs		
Reference	Extension	N° rungs				Kg	Reference*	Height	Kg
F7210MT	Push-up	2x10	3000	4960	450	22	PG10A	3000/5000	11
F7210CT	Rope-operated	2x10	3000	4960	450	25			
F7212MT	Push-up	2x12	3560	6080	450	25	PG12A	3500/6000	13
F7212CT	Rope-operated	2x12	3560	6080	450	28			

*The stabilising legs in the chart are made of aluminium. Stabilising legs are available in Aluminium (A) and in Fibreglass (F).

SAFETY LADDER ARISAFE-2

Equipped with lateral extendible legs to stabilise the ladder for tasks carried out on walls and a tying rope for tasks carried out on safe poles (concrete), anchorage point UNE-EN 795, height-adjustable legs, pole grip, eye-bolts and grippers.

Optional accessories: lifeline, harness, clamping system for ladders (Safeclamp®), helmet and mounts for roof racks for stabilising extendible legs. See page 34.



Standard
UNE-EN 131

Standard
UNE-EN 50528

Standard
UNE-EN 795

Insulation
100 KV

Ref. F7212MEF
on a wall /
Legs PL12F



Ref. F7210MEF
on a safe pole



Ladder							Stabilising Legs		
Reference	Extension	N° rungs				Kg	Reference*	Height	Kg
F7210ME	Push-up	2x10	3000	4960	450	22	PL10A	2000/3500	7
F7210CE	Rope-operated	2x10	3000	4960	450	25			
F7212ME	Push-up	2x12	3560	6080	450	25	PL12A	2500/4300	9
F7212CE	Rope-operated	2x12	3560	6080	450	28			
F7214ME	Push-up	2x14	4120	7200	450	28	PL14A	3000/5000	10
F7214CE	Rope-operated	2x14	4120	7200	450	31			
F9216CE	Rope-operated	2x16	4680	8320	500	36	PL16A	3500/5700	12

*The stabilising legs in the chart are made of aluminium. Stabilising legs are available in Aluminium (A) and in Fibreglass (F).

The values are shown in millimetres.

FIBREGLASS SAFETY LADDERS EQUIPPED WITH AN ANCHORAGE POINT

SAFETY LADDER ARISAFE-3

Equipped with lateral extendible legs to stabilise the ladder for tasks carried out on walls, anchorage point UNE-EN 795, height-adjustable legs.

Optional accessories: lifeline, harness, clamping system for ladders (Safeclamp®), helmet and mounts for roof racks for stabilising extendible legs. See page 34.




Standard
UNE-EN 131

Standard
UNE-EN 50528

Standard
UNE-EN 795

Insulation
100 KV

Ref. F7212MS /
Legs PL12A

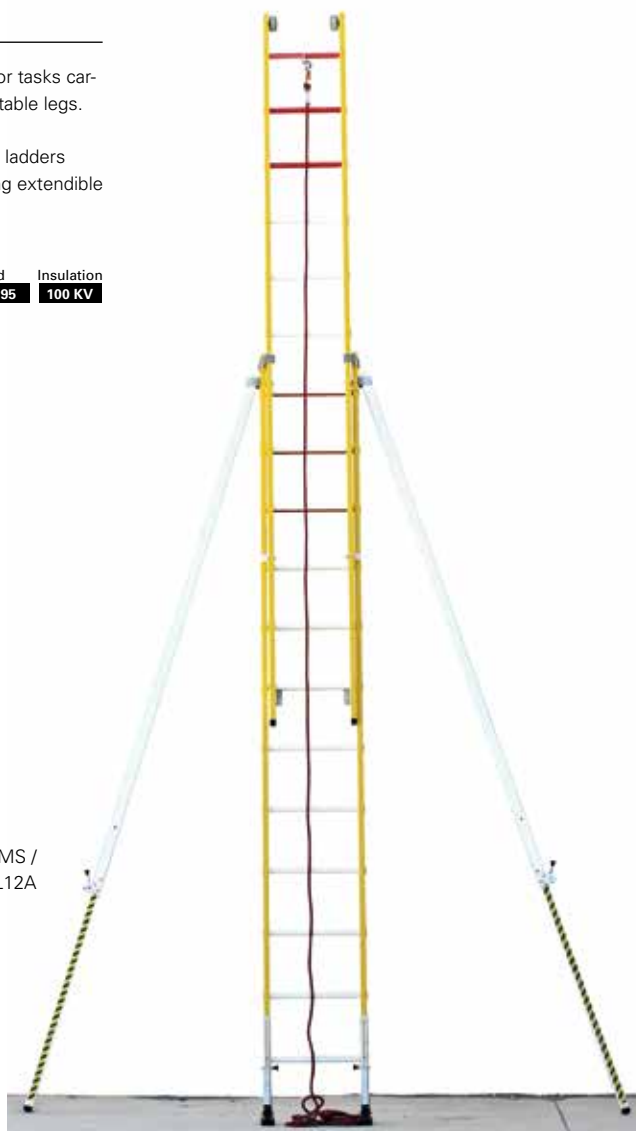

Wall wheels



Lateral extendible legs



EN-795 anchorage point to connect a lifeline

Ladder							Stabilising Legs		
Reference	Extension	N° rungs				Kg	Reference*	Height	Kg
F7210MS	Push-up	2x10	3000	4960	450	22	PL10A	2000/3500	7
F7210CS	Rope-operated	2x10	3000	4960	450	25			
F7212MS	Push-up	2x12	3560	6080	450	25	PL12A	2500/4300	9
F7212CS	Rope-operated	2x12	3560	6080	450	28			

*The stabilising legs in the chart are made of aluminium. Stabilising legs are available in Aluminium (A) and in Fibreglass (F).

The values are shown in millimetres.

SAFETY LADDER ARISAFE-4

The most versatile of all ARISAFE ladders: equipped with the accessories needed to fix the pole tying system, the extendible legs with hooks and the lateral extendible legs depending on the task to be carried out (extendible legs not included).

Optional accessories: lifeline, harness, clamping system for ladders (Safeclamp®), helmet and mounts for roof racks for stabilising extendible legs. See page 34.



Ref. F7212MET



Wall wheels



Lateral extendible legs



Hooking system of the aluminium extendible legs

Ladder							Stabilising Legs	
Reference	Extension	N° rungs				Kg	Reference	
F7210MET	Push-up	2x10	3000	4960	450	22	PL10A and PG10A	
F7210CET	Rope-operated	2x10	3000	4960	450	25		
F7212MET	Push-up	2x12	3560	6080	450	25	PL12A and PG12A	
F7212CET	Rope-operated	2x12	3560	6080	450	28		

STANDARD TIMBER LADDERS

SINGLE SECTION LADDER



Standard
UNE-EN 131

Rung on its edge:

Ref.	N° Rungs				Kg
A6	6	1780	400	-	6
A7	7	2060	400	-	7
A8	8	2340	400	-	8
A9	9	2620	400	-	8.5
A10	10	2900	400	-	9
A12	12	3460	400	756	10
A14	14	4020	400	812	12
A16	16	4580	450	868	14

54 mm flat rung:

A6P	6	1780	400	-	7
A7P	7	2060	400	-	8
A8P	8	2340	400	-	9
A9P	9	2620	400	-	10
A10P	10	2900	400	-	11.5
A12P	12	3460	400	756	14
A14P	14	4020	400	812	16
A16P	16	4580	450	868	18.5

* For other measures, please contact us.



Ref. A12P



Beech rung



Base stabiliser when height exceeds 3 m



Metal plate with serial number, reference and measures

EXTENSION LADDERS

Equipped with a metal plate with the serial number, reference and measures.

Reference T: the two sections can be separated.



Standard
UNE-EN 131

Model T. Push-up extension ladder:

Ref.	N° Rungs				Kg
T7	2x7	2020	3420	726	15
T9	2x9	2580	4260	810	17
T10	2x10	2860	4820	866	20
T12	2x12	3420	5940	978	24
T14	2x14	3980	6780	1062	27
T16	2x16	4540	7900	1174	32

Model B. Rope-operated extension ladder:

B10	2x10	2950	4910	880	21
B12	2x12	3510	6030	992	25
B14	2x14	4070	6870	1076	28
B16	2x16	4630	7990	1188	33

* For other measures, please contact us.

Ref. T10

Ref. B10





The values are shown in millimetres.

DOUBLE-SIDED LADDER MODEL D



Rung on its edge:

Ref.	N° Rungs			Kg
D4	2x4	1220	496	5.5
D5	2x5	1500	530	7
D6	2x6	1780	564	8
D7	2x7	2060	598	9
D8	2x8	2340	624	11
D9	2x9	2620	658	12
D10	2x10	2900	696	15
D12	2x12	3460	772	18
D14	2x14	4020	840	21
D16	2x16	4580	908	24

54 mm flat rung:

D4P	2x4	1220	488	6
D5P	2x5	1500	522	8
D6P	2x6	1780	556	9
D7P	2x7	2060	590	11
D8P	2x8	2340	624	13
D9P	2x9	2620	658	15
D10P	2x10	2900	696	20
D12P	2x12	3460	772	25
D14P	2x14	4020	840	32



Ref. D7P



Beech rung on its edge



Beech flat rung





Metal plate with serial number, reference and measures

DOUBLE-SIDED LADDER MODEL G

Unvarnished.



Rung on its edge:

Ref.	N° Rungs			Kg
G3	2x3	940	454	4
G4	2x4	1220	488	6
G5	2x5	1500	522	7
G6	2x6	1780	556	8
G7	2x7	2060	590	9
G8	2x8	2340	624	11
G9	2x9	2620	658	12
G10	2x10	2900	692	15

60 mm flat rung:

G3P	2x3	940	454	4
G4P	2x4	1220	488	6
G5P	2x5	1500	522	8
G6P	2x6	1780	556	9
G7P	2x7	2060	590	11
G8P	2x8	2340	624	13
G9P	2x9	2620	658	15
G10P	2x10	2900	692	20



Ref. G6P



Maritime pine wood rung on its edge



Maritime pine wood flat rung






Hinge

STANDARD ALUMINIUM LADDERS

SINGLE SECTION ALUMINIUM LADDER



Standard
UNE-EN 131

Ref.	N° Rungs				Kg
A6108	8	2415	410	-	4.5
A6110	10	2970	410	-	6
A6112	12	3550	410	765	7.5
A6114	14	4110	410	825	9



Ref. A6112



Stabiliser






Rung

ALUMINIUM ROPE-OPERATED EXTENSION LADDER



Standard
UNE-EN 131

Ref.	N° Rungs				Kg
A7212C	2x12	3560	6070	1025	19
A7214C	2x14	4120	7200	1140	22
A7216C	2x16	4680	8045	1200	25



Ref. A7212C



Locking system



Pulley



Wall wheels

The values are shown in millimetres.

ALUMINIUM TWO SECTION COMBINATION LADDER

The two sections can be separated.



Standard
UNE-EN 131

Ref.	N° Rungs				Kg
AC6208	2x8	2420	4100	760	11
AC6210	2x10	2980	4940	810	13
AC7212	2x12	3560	6060	1010	16



Ref. AC6208

ALUMINIUM TWO SECTION COMBINATION LADDER "ARALAR"


Curved stiles to widen the base of support without stabiliser.



Standard
UNE-EN 131

Ref.	N° Rungs				Kg
Aralar-8	2x8	2250	3750	750	10
Aralar-10	2x10	2800	4760	855	12,5
Aralar-12	2x12	3250	5750	960	17
Aralar-14	2x14	3800	6500	1090	20,5
Aralar-16	2x16	4250	7250	1090	24,5

*Reference Aralar-16 is only of extension use, it cannot be used as a double-sided ladder.

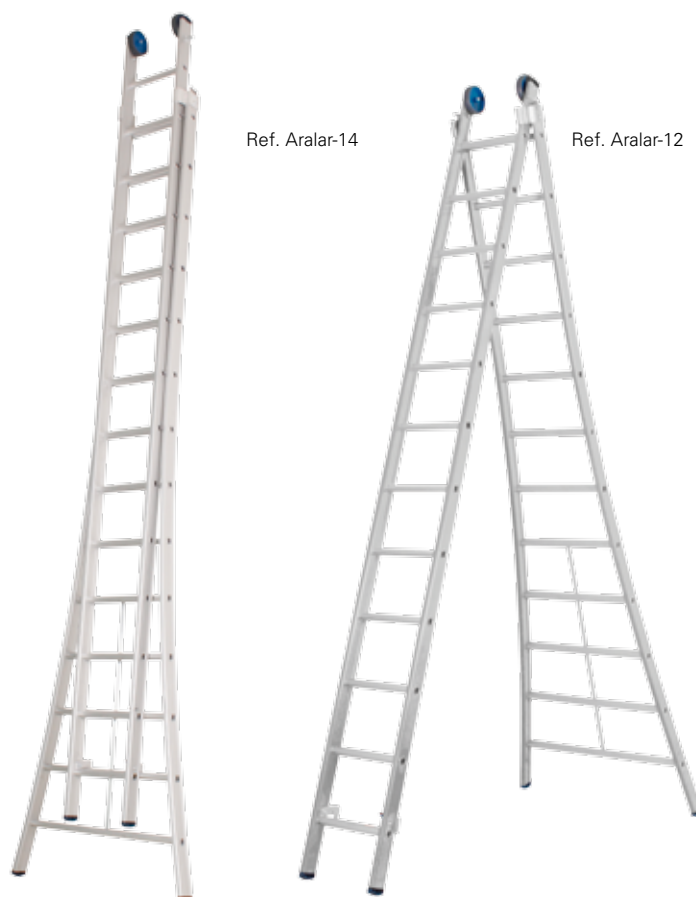

Ref. Aralar-14

Ref. Aralar-12

The values are shown in millimetres.

STANDARD ALUMINIUM LADDERS

ALUMINIUM THREE SECTION COMBINATION LADDER

Sections can be separated.



Standard
UNE-EN 131

Ref.	N° Rungs					Kg
AC6308	3x8	5820	4100	2450	812	17
AC7310	3x10	6930	4950	3000	910	20
AC7312	3x12	8600	6100	3570	1010	25



Ref. AC6308

ALUMINIUM THREE SECTION COMBINATION LADDER "ARLAS"

Curved stiles to widen the base of support without stabiliser.



Standard
UNE-EN 131

Ref.	N° Rungs					Kg
Arlas-8	3x8	5250	3710	2250	960	16
Arlas-10	3x10	6250	4460	2800	1090	21
Arlas-12	3x12	7750	5470	3250	1200	28,5
Arlas-14	3x14	9050	-	3800	1200	33,5
Arlas-16	3x16	10250	-	4250	1200	38,5



Ref. Arlas-14

Ref. Arlas-12

*References Arlas14 and Arlas-16 are only of extension use, they cannot be used as double-sided ladders.

The values are shown in millimetres.

ALUMINIUM PLATFORM STEPLADDER "URBASA"

100 mm treads.



Ref.	N° Rungs				Kg
Urbasa-3	2+plat.	1540	750	520	5
Urbasa-4	3+plat.	1810	1000	550	7
Urbasa-5	4+plat.	2100	1250	590	8,5
Urbasa-6	5+plat.	2350	1500	620	10
Urbasa-7	6+plat.	2620	1750	650	11
Urbasa-8	7+plat.	2900	2000	680	12
Urbasa-9	8+plat.	3170	2250	720	13
Urbasa-10	9+plat.	3400	2500	750	15,5
Urbasa-12	11+plat.	3980	3000	810	20



Ref. Urbasa-5



Tool holder tray



Tread



Non-slip shoes

ALUMINIUM PLATFORM STEPLADDER "RONCAL"

80 mm treads.



Ref.	N° Treads				Kg
Roncal-3	2+plat.	1530	680	510	8
Roncal-4	3+plat.	1780	920	530	9
Roncal-5	4+plat.	2030	1160	550	10
Roncal-6	5+plat.	2280	1400	580	11.5
Roncal-7	6+plat.	2530	1630	610	12.5
Roncal-8	7+plat.	2780	1870	630	15
Roncal-10	9+plat.	3280	2330	680	17.5
Roncal-12	11+plat.	3780	2810	730	21



Ref. Roncal-5



Tool holder tray



Tread

STANDARD ALUMINIUM LADDERS

ALUMINIUM PLATFORM STEPLADDER "GALAR"

80 mm treads.



Standard
UNE-EN 131

Ref.	N° Treads				Kg
Galar-3	2+plat.	1380	660	450	4
Galar-4	3+plat.	1640	890	480	4.5
Galar-5	4+plat.	1890	1120	500	5
Galar-6	5+plat.	2140	1350	530	6
Galar-7	6+plat.	2380	1580	550	7
Galar-8	7+plat.	2650	1820	570	8



Ref. Galar-3



Non-slip 30x26 cm platform



Tool holder tray



Non-slip shoes

ALUMINIUM DOUBLE-SIDED STOOL "YESA"

80 mm treads.



Standard
UNE-EN 14183

Ref.	N° Treads			Kg
Yesa-2	1+plat.	450	420	3.5
Yesa-3	2+plat.	690	440	4.5
Yesa-4	3+plat.	920	560	5.5






Ref. Yesa-3

The values are shown in millimetres.

ALUMINIUM DOUBLE-SIDED LADDER "ORI"

100 mm treads.



REF.	N° Treads				Kg
Ori-2	2x2	600+600	500	480	3
Ori-3	2x3	850+600	750	520	5
Ori-4	2x4	1130	1000	560	7
Ori-5	2x5	1415	1250	580	9
Ori-6	2x6	1680	1500	620	11
Ori-7	2x7	1960	1750	650	13
Ori-8	2x8	2230	2000	680	15
Ori-10	2x10	2770	2500	750	19
Ori-12	2x12	3310	3000	820	23



Ref. Ori-5



Guardrail





Non-slip shoes

ALUMINIUM DOUBLE-SIDED LADDER "ISABA"

80 mm treads. Replaceable treads.



Ref.	N° Treads			Kg
Isaba-2	2x2	500	420	4
Isaba-3	2x3	750	450	5.5
Isaba-4	2x4	1000	480	6.5
Isaba-6	2x6	1500	530	11.5
Isaba-8	2x8	2000	580	14
Isaba-10	2x10	2500	630	17.5
Isaba-12	2x12	3000	680	20.5



Ref. Isaba-8



Hinge



Reinforced tread



Non-slip aluminium tread





STANDARD ALUMINIUM LADDERS

ALUMINIUM DOUBLE-SIDED TELESCOPIC LADDER "IRATI"

5 YEARS WARRANTY

150 KG

Standard
UNE-EN 131

Ref.	N° Rungs					Kg
Irati-6	3+3	1020	2800	540	-	11.5
Irati-8	4+4	1200	2800	580	-	14
Irati-10	5+5	1500	2800	650	-	16.5

Measures with stabiliser:

Irati-8T	4+4	1200	3900	580	1030	14.5
Irati-10T	5+5	1500	5000	620	1100	17.5
Irati-12T	6+6	1800	5550	720	1250	20.5








ALUMINIUM TELESCOPIC MULTIPURPOSE LADDER "ZIZUR"

5 YEARS WARRANTY

150 KG

Standard
UNE-EN 131

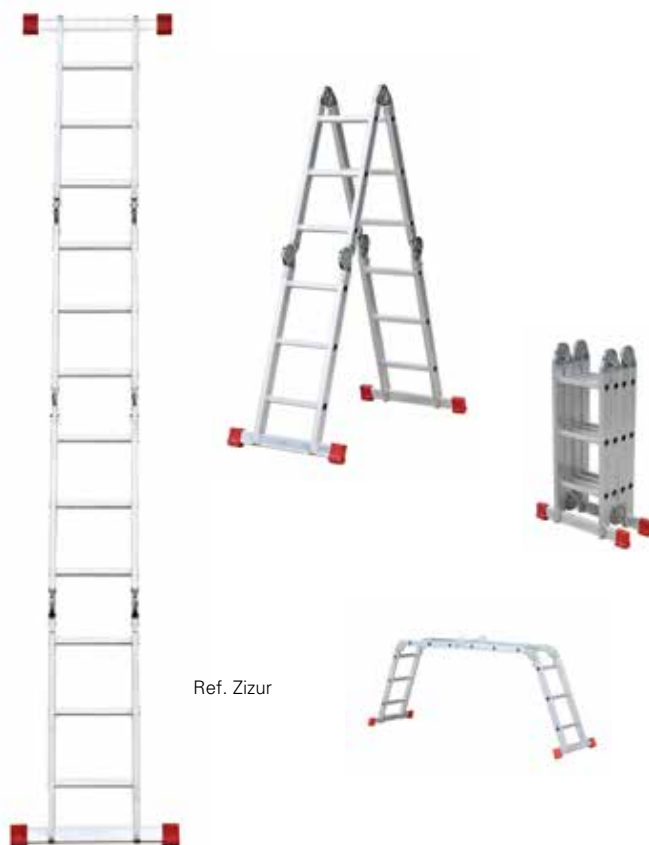

Ref.	N° Rungs					Kg
Zizur	4x3	1570	3460	900	700	11
Zizur-1	4x4	2440	4660	-	800	15



The values are shown in millimetres.

ALUMINIUM FARM LADDER



Ref.	N° Rungs			Kg
AGR-8	8	2350	820	7
AGR-10	10	2920	1000	9.5
AGR-12	12	3480	1200	12
AGR-14	14	4060	1350	15

References with 80 mm treads:






AGR-8P	8	2940	890	13.5
AGR-10P	10	3500	1050	17
AGR-12P	12	4060	1210	21
AGR-14P	14	4620	1360	25



ALUMINIUM WORK PLATFORM "BAZTÁN"

80 mm treads.



Ref.	N° Treads						Kg
BAZ1-1	plat.	240	900	300	1090	330	6
BAZ1-2	plat.	240	1200	300	1390	330	7
BAZ1-3	plat.	240	900	450	1090	480	7.5
BAZ1-4	plat.	240	1200	450	1390	480	9
BAZ2-1	1+plat.	490	900	300	1300	370	7.5
BAZ2-2	1+plat.	490	1200	300	1600	370	9
BAZ2-3	1+plat.	490	900	450	1300	520	9
BAZ2-4	1+plat.	490	1200	450	1600	520	11
BAZ2-5	1+plat.	490	1500	450	1900	520	12
BAZ2-6	1+plat.	490	900	600	1300	670	11
BAZ2-7	1+plat.	490	1200	600	1600	670	13
BAZ2-8	1+plat.	490	1500	600	1900	670	14
BAZ3-1	2+plat.	740	1200	450	1800	560	11
BAZ3-2	2+plat.	740	1500	450	2100	560	14.5
BAZ3-3	2+plat.	740	1200	600	1800	710	15
BAZ3-4	2+plat.	740	1500	600	2100	710	16
BAZ4-1	3+plat.	990	1500	450	2300	600	15
BAZ4-2	3+plat.	990	1500	600	2300	750	18



Optional accessories: guardrail, base stabiliser and wheels (on-demand production).

The values are shown in millimetres.

ROLLING PLATFORM LADDERS

FIBREGLASS ROLLING PLATFORM LADDER. 65° CLIMBING ANGLE

Rolling platform ladder with 60x80 cm platform made of fibreglass.
Climbing angle at 65°.




10
YEARS

MADE
SPAIN

150
KG

Standard
UNE-EN 131-7

Insulation
100 KV

Ref.	N° Treads				Kg
F-ALM03	2+plat.	1799	746	760	33
F-ALM04	3+plat.	2053	1000	820	36
F-ALM05	4+plat.	2307	1254	990	38
F-ALM06	5+plat.	2561	1508	1160	41
F-ALM07	6+plat.	2814	1761	1330	46
F-ALM08	7+plat.	3068	2015	1500	52



Ref. F-ALM05

FIBREGLASS ROLLING PLATFORM LADDER. 55° CLIMBING ANGLE

Rolling platform ladder with 60x80 cm platform made of fibreglass.
Climbing angle at 55°.




10
YEARS

MADE
SPAIN

150
KG

Standard
UNE-EN 131-7

Insulation
100 KV

Ref.	N° Treads				Kg
F-ALM03-55	2+plat.	1816	766	760	45
F-ALM04-55	3+plat.	2045	995	820	50
F-ALM05-55	4+plat.	2275	1224	990	56
F-ALM06-55	5+plat.	2504	1454	1160	64
F-ALM07-55	6+plat.	2733	1683	1330	69
F-ALM08-55	7+plat.	2963	1913	1500	77



Ref. F-ALM10-55

The values are shown in millimetres.

ALUMINIUM ROLLING PLATFORM LADDER "ESTELLA"

200 mm treads.
60x80 cm platform.
Product supplied partially disassembled.



Ref.	N° Treads					Kg
Estella-3	2+plat.	1750	750	1300	890	29.5
Estella-4	3+plat.	1950	950	1500	890	33
Estella-5	4+plat.	2200	1200	1700	890	36.5
Estella-6	5+plat.	2450	1450	1900	1070	41
Estella-7	6+plat.	2700	1700	2100	1200	44.5
Estella-8	7+plat.	2950	1950	2300	1200	49.5



Ref. Estella-5

ALUMINIUM ROLLING PLATFORM LADDER "VIANA"

200 mm treads.
60x80 cm platform.
Product supplied partially disassembled.



Ref.	N° Treads					Kg
Viana-3	2+plat.	1750	750	1500	890	38.5
Viana-4	3+plat.	1950	950	1750	890	40
Viana-5	4+plat.	2200	1200	2050	890	44.5
Viana-6	5+plat.	2450	1450	2350	1070	49.5
Viana-7	6+plat.	2700	1700	2600	1200	54
Viana-8	7+plat.	2950	1950	2900	1200	58



Ref. Viana-5

ROLLING PLATFORM LADDERS

ALUMINIUM ROLLING PLATFORM LADDER "BEIRE"

80 mm treads.
60x60 cm platform.
Product supplied partially disassembled.



Standard
UNE-EN 131-7

Ref.	N° Treads					Kg
Beire-3	2+plat.	1840	740	1000	850	19.5
Beire-4	3+plat.	2090	990	1100	940	21
Beire-5	4+plat.	2340	1240	1200	1050	22.5
Beire-6	5+plat.	2590	1490	1300	1150	24.5
Beire-8	7+plat.	3090	1990	1500	1300	29
Beire-10	9+plat.	3590	2490	1700	1500	34



Ref. Beire-5



Frontside



Backside

ALUMINIUM ROLLING PLATFORM LADDER "OLITE"

80 mm treads.
Can be folded.
45x45 cm platform.
Product supplied partially disassembled.



Standard
UNE-EN 131-7

Ref.	N° Treads					Kg
Olite-2	1+plat.	1430	480	820	950	15
Olite-3	2+plat.	1660	710	930	950	17
Olite-4	3+plat.	1890	940	1050	1000	19
Olite-6	5+plat.	2350	1400	1280	1050	22
Olite-8	7+plat.	2810	1860	1510	1100	25
Olite-10	9+plat.	3280	2330	1740	1150	28.5
Olite-12	11+plat.	3740	2790	1970	1790	33



Ref. Olite-6



Wheels



Non-slip aluminium treads

The values are shown in millimetres.

ALUMINIUM ROLLING PLATFORM LADDER "UJUÉ"

80 mm treads.





Can be folded. Equipped with handrails and 4 wheels.

45x45 cm platform.

Product supplied partially disassembled.



Standard
UNE-EN 131-7

Ref.	N° Treads					Kg
Ujué-2	1+plat.	1430	480	870	950	16
Ujué-3	2+plat.	1660	710	980	950	18
Ujué-4	3+plat.	1890	940	1100	1000	19.5
Ujué-6	5+plat.	2350	1400	1330	1050	23
Ujué-8	7+plat.	2810	1860	1560	1100	26.5
Ujué-10	9+plat.	3280	2330	1790	1680	29
Ujué-12	11+plat.	3740	2790	2020	1790	34.5



Ref. Ujué-6

ALUMINIUM ROLLING PLATFORM LADDER "BURGUI"




30 mm treads. 40x45 cm platform.

Available with 68° climbing angle.

Product supplied partially disassembled.



Standard
UNE-EN 131-7

Ref.	N° Treads				Kg
Burgui-3	2+plat.	1850	700/960	920	20
Burgui-4	3+plat.	2130	969/1220/1480	1280	22,5
Burgui-5	4+plat.	2410	1220/1480/1740/2000	1600	24,5



Ref. Burgui-4



Tool holder tray



Hinge



Non-slip aluminium platform and treads.

ROLLING PLATFORM LADDERS

ALUMINIUM ROLLING PLATFORM LADDER "UNX"

200 mm treads.

Available with a climbing angle at 45° and 65°.

60x60 cm platform.

Product supplied partially disassembled.



MADE SPAIN



Standard
UNE-EN 14183

Ref.	N° Treads					Kg
UNX45-2	1+plat.	400	600	1050	600	11.5
UNX45-3	2+plat.	600	600	1260	600	13.5
UNX45-4	3+plat.	800	600	1470	600	15.5
UNX45-5	4+plat.	1000	600	1680	600	18
UNX60-2	1+plat.	500	600	1020	600	10.5
UNX60-3	2+plat.	750	600	1140	600	12.5
UNX60-4	3+plat.	1000	600	1270	600	15.5



Ref. UNX60-4

FIBREGLASS ONE SECTION ACCESS LADDER WITH HANDRAILS

80 mm treads.

68° climbing angle.



MADE SPAIN




Ref.	N° Rungs				Kg
FPS7105P	5	2390	1270	600	14
FPS7106P	6	2670	1530	600	16
FPS7107P	7	2950	1790	600	18
FPS7108P	8	3230	2050	600	20
FPS7109P	9	3510	2310	600	22
FPS9110P	10	3790	2570	600	24
FPS9111P	11	4070	2830	600	26

*Vertical height from the top rung.



Ref. FPS9111P

The values are shown in millimetres.

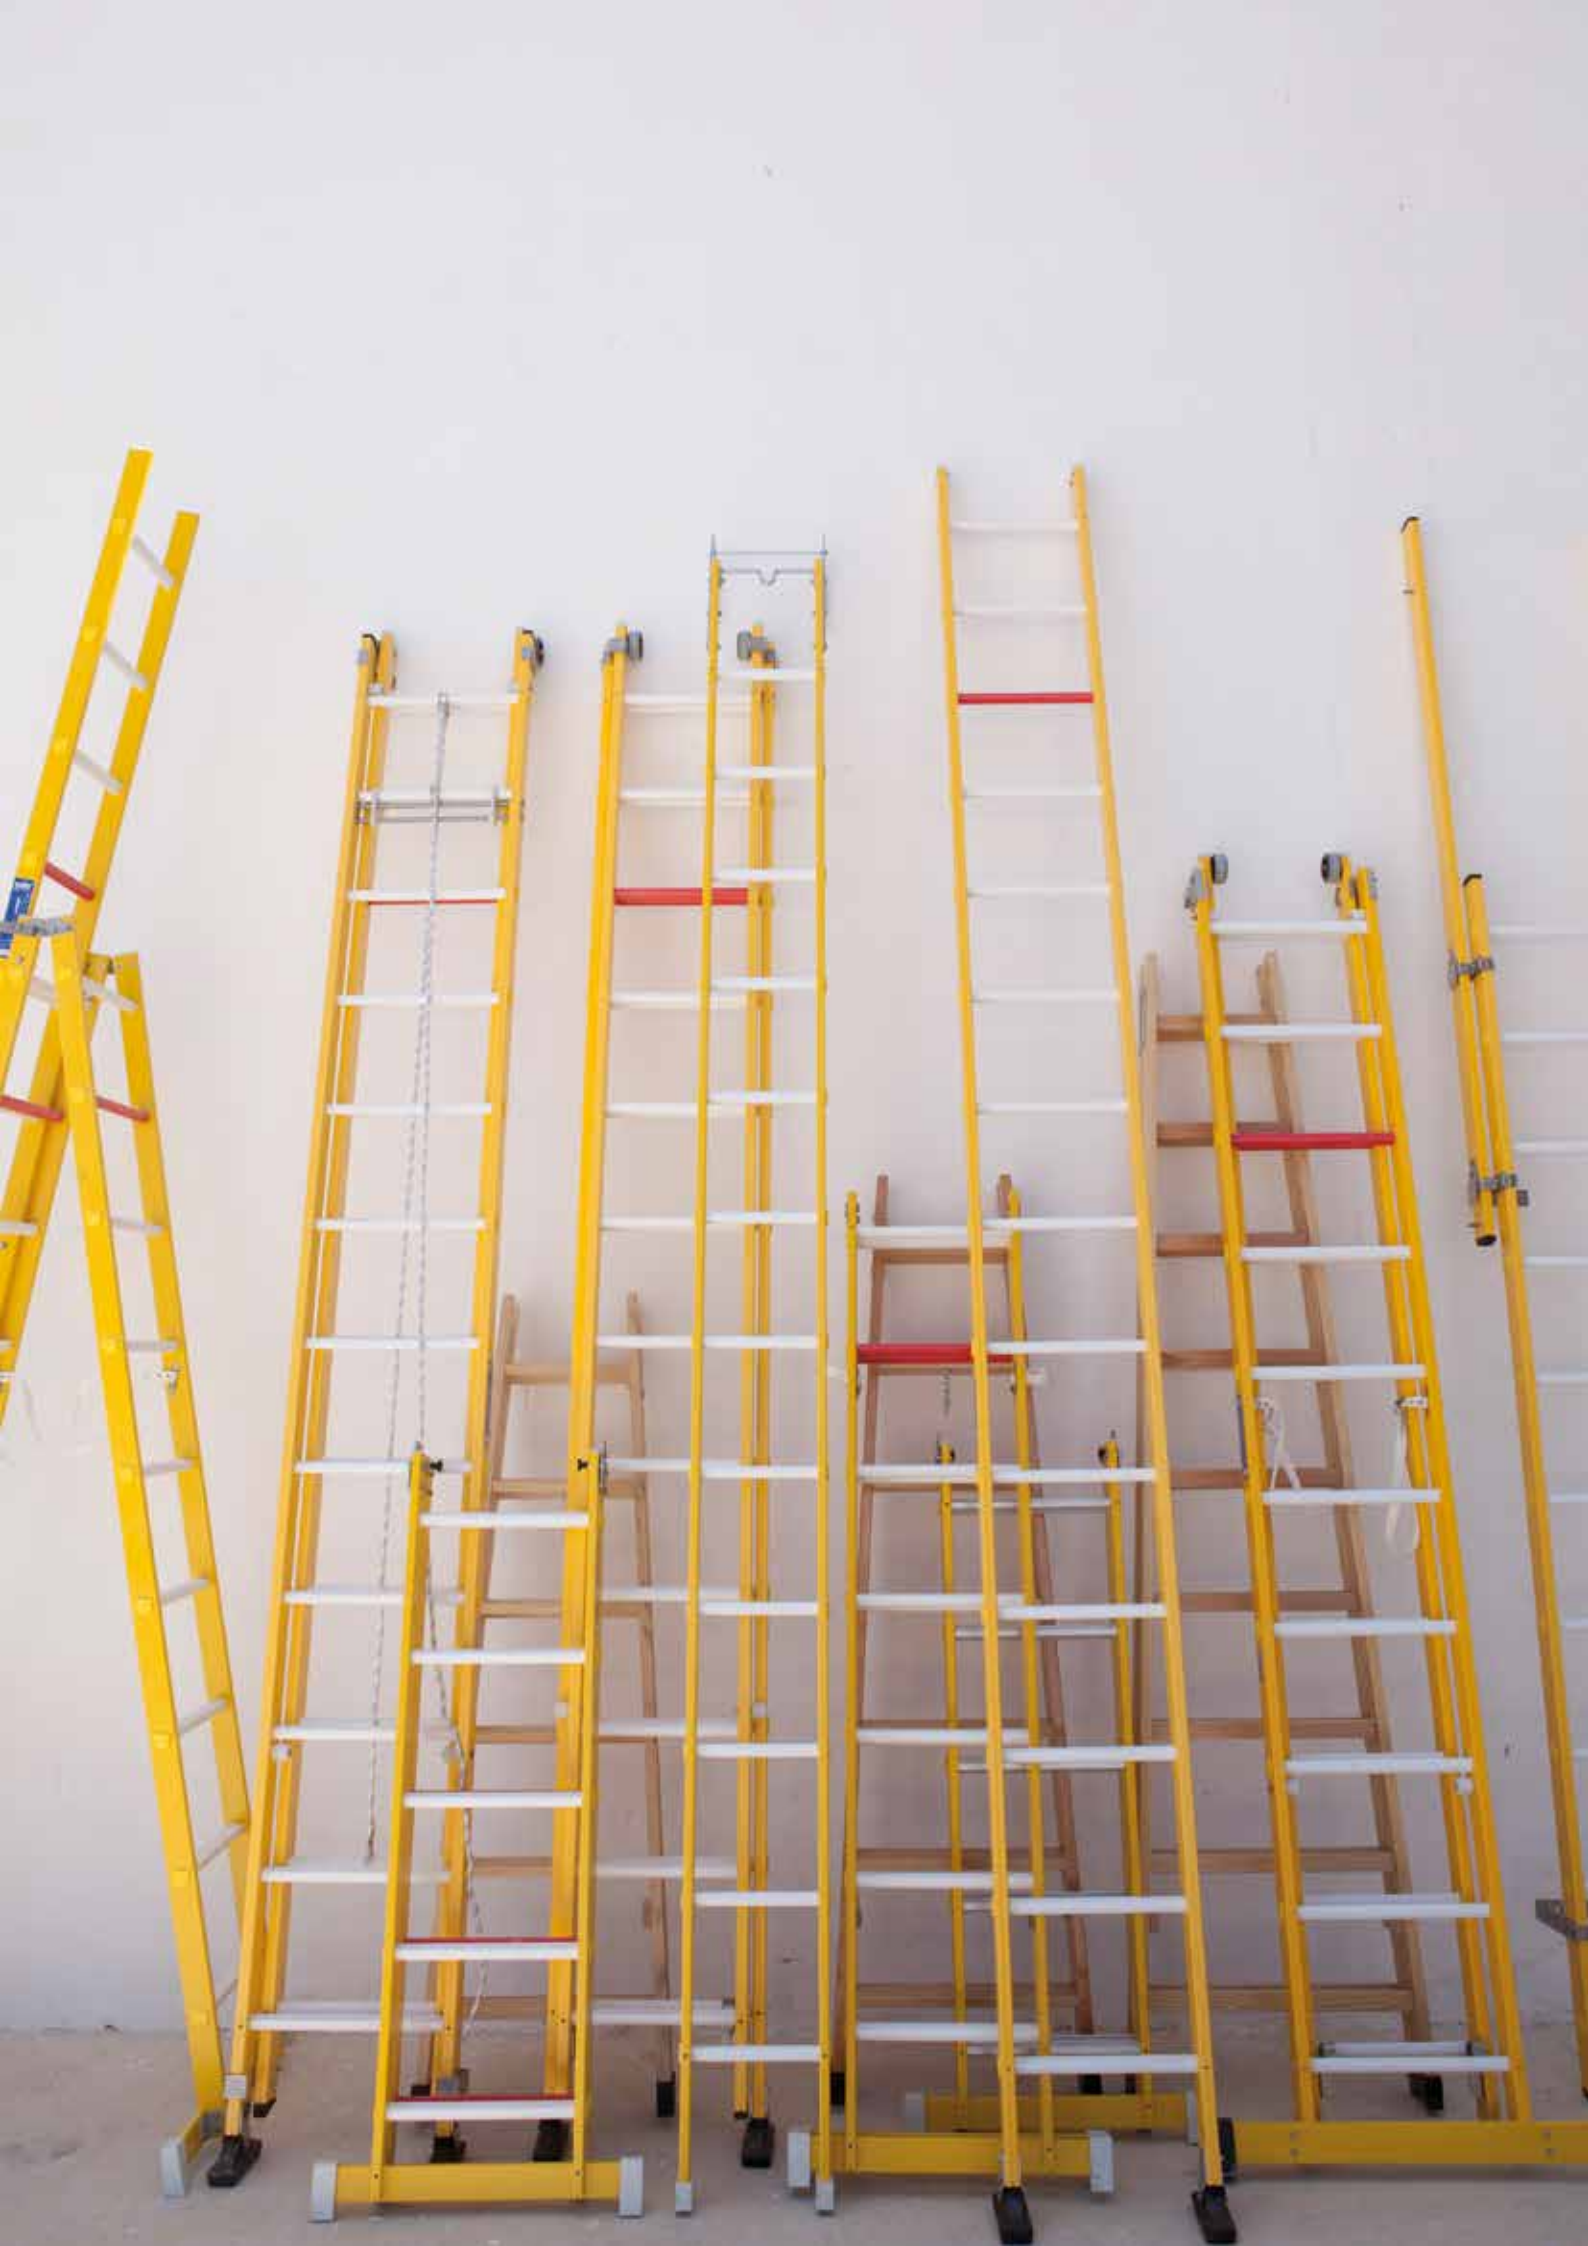

FIREFIGHTERS AND RESCUE LADDERS

FIBREGLASS ASSAULT LADDER F-ASALT & F-ASALT-P

Both ladders are made of a single section of fibreglass. F-ASALT-P is foldable.

Measures of the hooks: 160, 200, 250, 305, 350 and 500 mm.



Ref.	N° Rungs				Kg
F-ASALT	12	3820	-	288	12,5
F-ASALT-P	12	3820	2024	288	13



Ref. F-ASALT



Ref. F-ASALT-P

FIBREGLASS ASSAULT LADDER F-ASALT V027

Made with oval profiles and with embedded plugs, improving the ergonomics of the ladder.

Measures of the hooks: 200 and 500 mm.



Ref.	N° Rungs			Kg
F-ASALT-V027	12	3820	288	12,5



Ref. F-ASALT V027



Hooks and rope fittings

FIBREGLASS ROPE-OPERATED EXTENSION LADDER UNE-EN 1147

Two-person rescue ladder.



Standard
UNE-EN 1147

Standard
UNE-EN 50528

Insulation
100 KV

Ref.	N° Rungs				Kg
F7210C	2x10	3000	4960	450	24
F7211C	2x11	3280	5520	450	25.5
F9215C	2x15	4400	7760	450	34
F9216C	2x16	4680	8320	450	36
F9217C	2x17	4960	8880	450	38



Ref. F7211C



Locking system



Optional height-adjustable legs



Optional base stabiliser. According to new standard UNE-EN 131 when height exceeds 3 m.

ALUMINIUM ROPE-OPERATED EXTENSION LADDER UNE-EN 1147

Two-person rescue ladder.



Standard
UNE-EN 1147

Ref.	N° Rungs				Kg
AC10	2x10	3050	5300	430	18
AC16	2x16	4750	8100	430	28



Ref. AC16



Locking system



Extension rope and pulley



Swivel feet

FIXED VERTICAL LADDER / SHAFT LADDERS

FIBREGLASS FIXED VERTICAL LADDER

Entirely made of fibreglass reinforced polyester to be fixed to the wall or to the ground thanks to stainless steel brackets. Electrical and thermal insulation. Antimagnetic and highly resistant to humidity, acids, corrosion and ultra-violet rays.

30 mm D-shaped non-slip rungs, horizontal when in the position of use.

Stiles closed with rubber end caps.

Rungs closed with caps.

Optional: handrails which extend out of the pit and which are folded away after use, rest platform, safety cage and / or lifeline.



Standard
UNE-EN 14122-4

Standard
UNE-EN 14396

Insulation
100 KV



Optional rest platform



Handrails

ALUMINIUM FIXED VERTICAL LADDER

Aluminium ladder with 30 mm non-slip aluminium rungs.

Fixed to the wall thanks to aluminium or steel brackets.

Easy to install: supplied pre-assembled with instructions.

Bespoke ladders: height, aluminium or steel brackets to the wall and / or to the ground, with or without safety cage, intermediate platforms, etc...



Standard
UNE-EN 14122-4



The values are shown in millimetres.

FIBREGLASS SCAFFOLDS

Modular scaffold made of fibreglass. It is specially meant to be used in electrical and corrosive environments due to its insulating characteristics and resistance to humidity, acids and other corrosive agents. Also recommended for the food industry.

Several platform measures available:
 · Up to 8 m: 2 x 0.85 m / 2.5 x 0.85 m
 · Up to 12 m: 2 x 1.45 m / 2.5 x 1.45 m

Standard
EN 1004:2005-05



ALUMINIUM SCAFFOLDS

A vast array of lightweight aluminium scaffolds for professional and semi-professional use (folding, modular). Easy to assemble, very strong and stable.

Several measures and heights available according to the need of the customer.



ACCESSORIES

LIFELINE

- › Rope: Type A rope made from 11 mm polyamide. For professional use. Max arrest force (factor 1, mass 100 kg): 532 daN. Number of falls without breakage: > 20. Strength tied without sewn termination: 3265 daN. Strength tied with a figure eight knot: \geq 1500 kg. According to EN1891-88. Class A.
- › Connector: D shaped connector made of aluminum alloy. 1/4 turn twist lock system. Automatic locking system, ideal for frequent use. 2 units supplied.
- › Fall arrest system: Can be fitted to the rope at any point and can be used hands-free when travelling up or down the rope. To be used with approved ropes of 10.5/12.7 mm. diameter. According to: EN 353-2 · EN 358 · EN 12841-A.homologadas. Conforme a las normas: EN 353-2 · EN 358 · EN 12841-A.



21-C ATEX HARNESS

- › Different sizes and models of harnesses with two fall arrest points: dorsal and chest. Optional belt.



SAFETY HELMET EKAIN

- › Compact and extra light helmet. Outside shells are made of polycarbonate.
- › Improved ventilation through aluminium mesh system for better breathability.
- › Fastening with ratchet for a simple, quick and efficient adjustment.
- › 30 mm groove for auditory hearing graft.
- › Size: 51-62 cm.
- › Weight: 375 g.
- › Complies with EN-397.



MOUNTS FOR ROOF RACK

- › Designed to transport the stabilising extendible legs of the safety ladders on the roof rack. Manufactured in stainless steel which provides a high mechanical strength and resistance to corrosion.
- › Composed of two mounts: one for the front part of the vehicle and one for the back part. Each mount is closed with a lock. The mounts have two functions: the transport of the stabilising legs and to block the male part of the legs and prevent from opening while driving.
- › Custom-made according to the Brand of the roof rack (dimensions needed).



SAFECLAMP®

- › Ladder clamping system.
- › Manufactured from tough composite materials and stainless steel anchor hook.
- › Anti-theft supplied with key locks.
- › Life cycle tested 20g (ECE17.07) and crash tested.



POLE GRIP – V RUNG

- › 35 mm wide polyester band. – Stainless steel non-slip V rung.
- › Placed above the top rung, to rest against the pole.
- › Highly resistant.
- › Replaceable.
- › Recommended for all fiberglass / timber single section and extension ladders.



POLE GRIP AND LASH

- › 35 mm wide, 1.5 m long polyester belt fitted with a rapid grip device.
- › Placed above the top rung to secure the ladder to the pole.
- › Highly resistant.
- › Replaceable.
- › Recommended for all fiberglass / timber single section and extension ladders.




HEIGHT-ADJUSTABLE LEGS

- › Made of stainless steel. Equipped with non-slip swivel feet.
- › Cover up to 225 mm unevenness.
- › Equipped with an anti-theft system.
- › Designed for fiberglass / timber single section and extension ladders (push-up and rope-operated).
- › Height-adjustable legs for 60x20 mm stiles: References starting with F6.
- › Height-adjustable legs for 70x26 mm stiles: References starting with F7.
- › Height-adjustable legs for 82x32 mm stiles: References starting with F8.
- › Height-adjustable legs for 90x26 mm stiles: References starting with F9.



HEIGHT ADJUSTABLE STABILISER

- › Made of fibreglass and stainless steel.
- › To be used on uneven grounds such as sidewalks, slopes or any unevenness.
- › Equipped with non-slip swivel rubber feet.
- › Cover up to 210 mm unevenness. Adjustment every 15 mm.
- › Equipped with an anti-theft system.
- › Different widths depending on the length of the ladder.

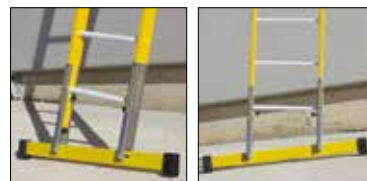

TOOL HOLDER TRAY

- › Made of okoumé plywood with a fibreglass edge.
- › Allows to keep your tools handy.
- › To be placed on the fly section of the extension ladders.
- › Easy to fix. No need of any tool or anchorage. Two positions: flat when in use or folded.
- › Dimensions: 300 x 300 mm



ACCESSORIES

150 mm PLATFORM

- › 150 mm tread portable platform.
- › Provides a greater support surface for user comfort.
- › Easily dismantlable.
- › Recommended for fibreglass single-section ladders, stepladders and extension ladders.



HOOKS, CHAINS AND EYEBOLTS

- › 160 mm diameter stainless steel hooks (hook inside dimensions) and chain with karabiner to secure the ladder.
- › Two eyebolts at the bottom of the ladder on the outer face of the stiles.
- › Recommended use: fibreglass single section ladders for works on electricity pylons.



STILE EXTENSIONS FOR FIBREGLASS STEPLADDERS AND SINGLE SECTION FOLDING LADDERS

- › Optionally, a stile extension can be mounted on the ladder for tasks on ramps or stairs. This extension has 4 hooks on which two rungs and a safety cam lock lay to prevent the extension from coming off while in use.
- › Manufactured from the same materials as the ladder: fibreglass reinforced polyester with yellow stiles and white rungs.



Ref.	Use recommended for	N° rungs	Length (mm)	Max. unevenness (mm)	Approx. weight (Kg)
FSB03	F6108P	3	885	245	4
FSB04	FT05 y F6110P	4	1210	510	5
FSB05	FT06 y F6112P	5	1490	775	6
FSB06	FT07	6	1770	1040	7
FSB07	FT08	7	2050	1305	8

ENSURE THE TRACEABILITY OF OUR PRODUCTS WITH THE NEW NFC TAG

You can now incorporate the NFC technology (Near Field Communication) which is a method of wireless data transfer that enables the identification and record of our products.

You only need a smartphone or a mobile reader device to have access to the product information and transfer it to your management system.

NFC tags resist even in extreme atmospheres (heat, humidity, dirt) and allow to ensure a more effective traceability than bar codes, plates... Data will always be legible and available. It is fast and wireless.

What data will you obtain?

Brand, reference, serial number, date of manufacture, height, weight, accessories, email contact.



Villbek Kft.

Szeged, Vágány utca 15. 6728

Tel.: +36304350795

E-mail: villbek@villbek.hu

Web: www.villbek.hu